







Automatically better welding



SO WIDE. SO LIGHT. SO TRUE COLOR.

You've never seen welding this way before.

OUR BEST INNOVATIONS IN ONE HELMET.

optrel presents the most innovative and ergonomically optimal helmet to date, expanding the welder's field of vision without compromising on comfort. The unique nose cut-out floats above the nose to position the auto-darkening display closer to the eyes. This enlarges the field of vision 6 times compared to conventional welding masks, without adding extra weight.

The panorama view - in combination with the 2.5 shade at lightstate and the optrel True Color optics - opens an entirely new visual dimension to the welding experience.

The panoramaxx features optrel's patented Autopilot function. Our unique 5-sensor array measures the brightness of the welding arc and automatically adjusts to the correct shade level.

The panoramaxx also marks the launch of optrel's unique new power system. Featuring a lithium-polymer power pack in combination with high-performance solar cells and an external USB charging option, the panoramaxx is the energy-independent, maintenance-free choice for professional welders.

The panora maxx combines optrel's groundbreaking innovations with an unprecedented panorama view - making it the most advanced welding helmet of its time.


To match the optrel panoramaxx field of vision, a typical rectangular auto-darkening filter would need to be as large as this 180 x 120 mm panel!

MAXXIMIZE YOUR HORIZON. WITH OPTREL'S PANORAMAXX.





is still a lightweight at only 550 g.

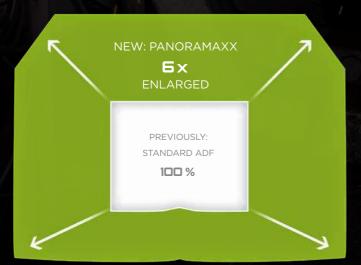

WELCOME TO A NEW DIMENSION OF VIEWING. IN ALL PROCESSES.



AUTOPILOT

Detection of the arc brightness and fully automated shade level adjustment from 5 to 12.

Light Autopilot range for all important work sequences

inactive mode Adjusts automatically to the changing light conditions of the current welding method. Automatic adjustment up to shade level 12!

* If preferred, the Autopilot can be deactivated for manual shade level selection.

Shade level


2.5





TRUE COLOR

A specially developed UV/IR filter allows the realistic color perception typical of optrel, bringing color to the welder's world.

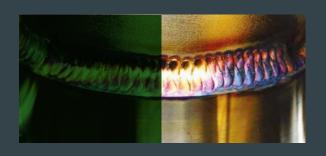





You will see better: · during setup

- · during welding
- · during seam inspection
- · during grinding
- · during stitching

Better vision improves your safety, comfort and efficiency in the workplace.

Panoramaxx FAPR helmet 4441,660 Front cover lens (5 pcs.) 5000,270						
Spare parts and accessories Item no.	Helmet system		Item no.	Main accessories		Item no.
Spare parts and accessories Item no.			1010.000		optrel parking buddy	5002.900
Spare parts and accessories Item no.	100		4441.660		Front cover lens (5 pcs.)	5000.270
Spare parts and accessories Item no.					Nose guard pad (2 pcs.)	5003.600
Spare parts and accessories Item no.					Adjustable headband	5003.263
1 Front cover lens (5 pcs.) 5000.270 2 Cover for Micro USB connection (2 pcs.) 5003.520 3 Inside cover lens (5 pcs.) 5000.010 4 Nose guard pad (2 pcs.) 5003.600 5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263				J Cooper	optrel bag for helmets	8000.100
1 Front cover lens (5 pcs.) 5000.270 2 Cover for Micro USB connection (2 pcs.) 5003.520 3 Inside cover lens (5 pcs.) 5000.010 4 Nose guard pad (2 pcs.) 5003.600 5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263	and the state of t					
2 Cover for Micro USB connection (2 pcs.) 5003.520 3 Inside cover lens (5 pcs.) 5000.010 4 Nose guard pad (2 pcs.) 5003.600 5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263				Spare parts	and accessories	Item no.
3 Inside cover lens (5 pcs.) 5000.010 4 Nose guard pad (2 pcs.) 5003.600 5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263						5000.270
4 Nose guard pad (2 pcs.) 5003.600 5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263			6			5003.520
5 Cotton sweatband (2 pcs.) 5004.073 6 Adjustable headband (including sweatband and comfortband) 5003.263		a G				5000.010
6 Adjustable headband (including 5003.263 sweatband and comfortband)						
sweatband and comfortband)						
				sweatban	d and comfortband)	5003.263

7 Comfortband (2 pcs.)

9 Breast protector, leather

8a Head and neck protector, leather 8b Head and neck protector PAPR, leather 5004.020 4028.016

4028.031

4028.015

THE HIGH-TECH WELDING MASK. SWISS MADE.

TECHNICAL DATA

Fully automated weldi	na mask with	
extra-large field of visi out floats above the no auto-darkening filter c er's eyes. True-Color fi shade levels 2.5/5-12M (automatic shade selectividual shade-prefere sensitivity control and optional twilight funct	on: the nose cut- ose to position the loser to the weld- lter protects at with Autopilot ction), +/- 2 in- nce adjustment, opening delay with	
inactive:	shade level 2,5	
active, manual:	shade level 7-12	
Automatic protection level regulation across a range from 5-12 with individual calibration option of ± 2		
Solar cells, lithium-polyrechargeable by USB-c		
300 to 500 charging c	ycles	
Five Sensors		
Infinitely adjustable, no "super high" sensitivity		
bright to dark: 0.090 ms at room tem 0.070 ms at 55°C	perature	
dark to bright: 0.1 s to 2.0 s (with twili	ght function)	
Depending on headbar 2.3x to 6.3x field of vis 100 x 50 mm standard	ion of a	
	extra-large field of visiout floats above the notauto-darkening filter cer's eyes. True-Color fishade levels 2.5/5-12M (automatic shade selective dividual shade-prefere sensitivity control and optional twilight funct inactive: active, manual: Automatic protection lacross a range from 5-calibration option of ± Solar cells, lithium-polyrechargeable by USB-calibration option of ± 300 to 500 charging of the Sensors Infinitely adjustable, now super high" sensitivity bright to dark: 0.090 ms at room tem 0.070 ms at 55°C dark to bright: 0.1 s to 2.0 s (with twility begending on headbald 2.3x to 6.3x field of vision shade and the sensor sensor sensor sensor sensor tem 0.20 s (with twility begending on headbald 2.3x to 6.3x field of vision shades and the sensor se	

classification Scattered light: Homogeneity: Angular dependence: Shape stability Welding mask: up to 220 °C / 428 °F Front cover lens: up to 137 °C / 279 °F Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating -10°C to + 70°C / 14°F to 158°F temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-			
Homogeneity: Angular dependence: Shape stability Welding mask: up to 220 °C / 428 °F Front cover lens: up to 137 °C / 279 °F Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating -10°C to + 70°C / 14°F to 158°F temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Plasmacutting & Oxy-gas Welding / Finding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-		Optical class:	
Angular dependence: Shape stability Welding mask: up to 220 °C / 428 °F Front cover lens: up to 137 °C / 279 °F Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating temperature Storage -10 °C to + 70 °C / 14 °F to 158 °F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-	classification	Scattered light: 1	
Shape stability Welding mask: up to 220 °C / 428 °F Front cover lens: up to 137 °C / 279 °F Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating -10°C to + 70°C / 14°F to 158°F temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-		Homogeneity:	
Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-		Angular dependence: 2	:
Eye protection Ultraviolet / Infrared Protection: maximum protection at any shade level Operating temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-	Shape stability	Welding mask: up to 220 °C / 428 °F	
maximum protection at any shade level Operating -10°C to + 70°C / 14°F to 158°F temperature Storage -20°C to + 80°C / -4°F to 176°F temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-		Front cover lens: up to 137 °C / 279 °F	
temperature Storage	Eye protection		
temperature Weight 550 g / 19,4 oz Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-		-10°C to + 70°C / 14°F to 158°F	
Application ranges Any electric arc welding process Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-	•	-20°C to + 80°C / -4°F to 176°F	
Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode Prohibited for laser welding! Scope of delivery Welding helmet, manual, storage bag, Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-	Weight	550 g / 19,4 oz	
Micro USB cable, warranty card and one front cover lens Standards CE, ANSI Z87.1 (ADF and helmet shell), EAC, complies with CSA Z94.3 Warranty 2 years 1 year warranty extension (except batte-	Application ranges	Electrode Welding (Stick Welding, SMAW / MIG / MAG (GMAW) / GMAW High melting rate process / Flux Cored Wire Welding / TIG welding (GTAW) / Plasma Arc Welding / Plasmacutting & Oxy-gas Welding / Grinding in Grind Mode	
Warranty EAC, complies with CSA Z94.3 2 years 1 year warranty extension (except batte-	Scope of delivery	Micro USB cable, warranty card and	
1 year warranty extension (except batte-	Standards		
	Warranty	2 years	
the first 6 months. http://register.optrel.com		ries) for online product registration within the first 6 months.	n

Your optrel Reseller:



optrel AG industriestrasse 2 CH-9630 wattwil switzerland www.optrel.com info@optrel.com

